


Growler Drafto Kit - Instructions

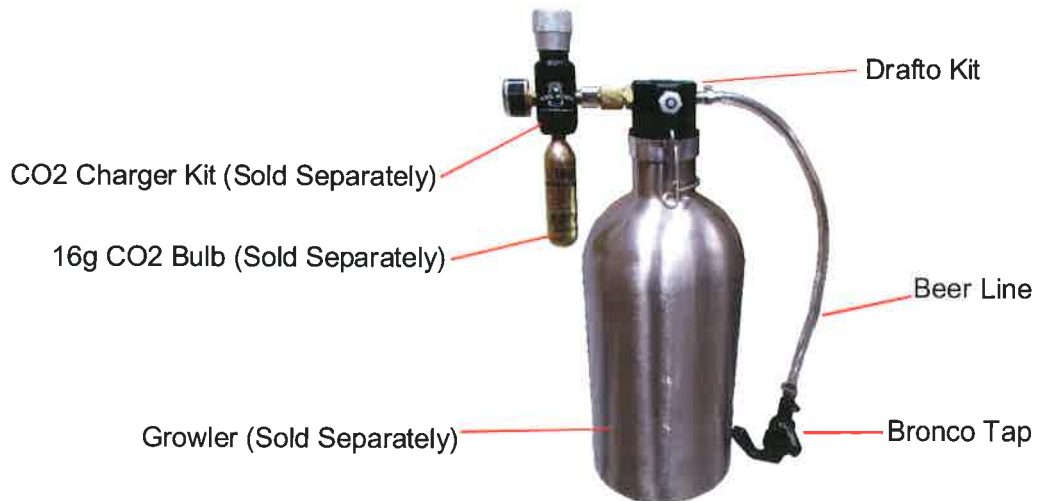

WARNING

- **DO NOT EXCEED 10PSI (70kPa)**
– Pressure Relief Valve is Pre-Set At Approximately 15psi (100kPa)
- **RECCOMENDED FOR USE WITH REGULATED CO2 SOURCE**
- **CLEAN AFTER USE**

Instructions

1. Remove regular growler cap from the growler but leave the bottom half of the wire bail on the growler. This can be done by flexing the wire bail slightly until it is released from the bent wire loop (see picture to Right).



2. Attach the growler Drafto Kit to the top of the growler.
3. Ensure your beer is as cold as possible (preferably below 1C)
4. Fill growler from your beer tap.
5. Pull down wire bail to secure the tap kit into place.
6. Attach gas charger (Part Number KL03223) to brass threaded inlet of the Drafto Kit.
7. Set dispense pressure between 0-5psi.
8. Use the bronco tap to fill your glass. Do not half open the bronco tap. The bronco tap should be fully opened in one swift motion to avoid foaming.

Cleaning Instructions

Clean all parts of the growler Drafto Kit and the growler itself with KegLand Sodium Percarbonate powder. Avoid contact with Caustic or Acid based cleaners.

Changing CO2 Cartridges

If you are changing the CO2 cartridge you must:

- Turn set pressure on regulator to zero
- Unscrew CO2 bulb from charger
- Screw in new CO2 bulb into charger
- Turn pressure back up to dispensing pressure and continue using the growler Drafto kit.